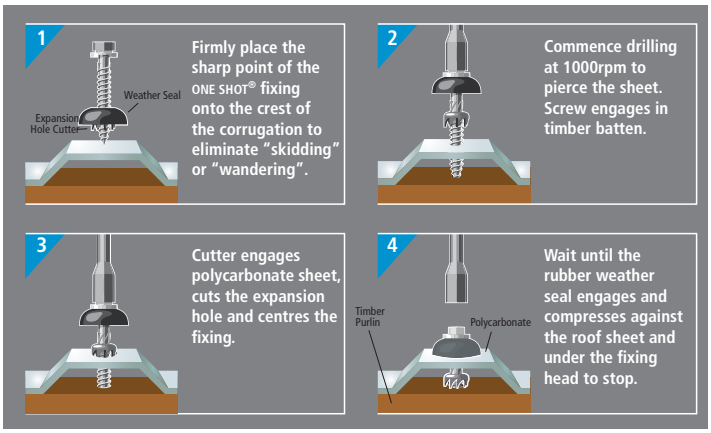
1
Weather Seal
Expansion Hole Cutter
Firmly place the sharp point of the ONE SHOT® fixing onto the crest of the corrugation to eliminate "skidding" or "wandering".
2
Commence drilling at 1000rpm to pierce the sheet. Screw engages in timber batten.
3
Cutter engages polycarbonate sheet, cuts the expansion hole and centres the fixing.
4
Timber Purlin
Polycarbonate
Wait until the rubber weather seal engages and compresses against the roof sheet and under the fixing head to stop.